



industries.

attachment).



Tandem hydraulic circuits to allow simultaneous operation without power loss.

Tandem gear pump providing 30 & 30 GPM at 1,400 pump RPM.

Stack type control valves located under seat for increased operator visibility and safety.

55 gallon truck frame mounted hydraulic reservoir with high capacity, 10-micron return line filter and removable access cover.

Folding joystick controls standard. 4-wire reinforced hoses in all pressure applications.

Oversize main pressure and return lines with bent tube-type fittings to eliminate heat problems.

### Miscellaneous


- LED light kits.
- Full range of attachments including continuous rotation grapples.
- Side-mounted aluminum tank built to SERCO specifications.
- Bolt-on gland cylinders.



# SERCOLOADERS. COM

## **LIFT DIAGRAM**

Capacities shown are maximum theoretical lift capacities based on loader system pressure rating indicated, loader is mounted on adequately sized vehicle, stabilizers deployed in down position and the entire unit is on firm, level ground.

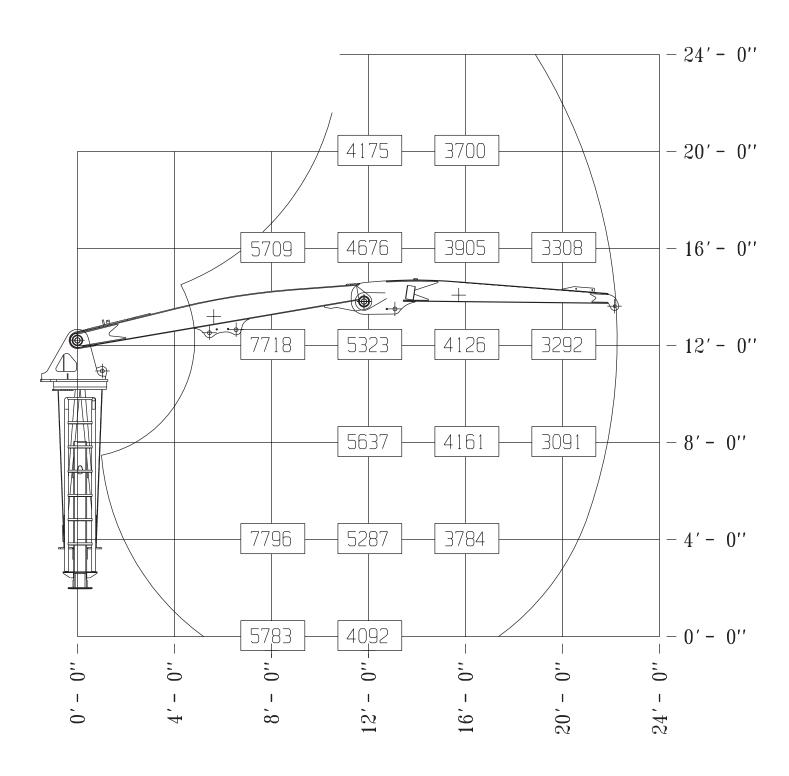

## **NOTES**

_			
_			



## YOUR NEW LOADER AWAITS!

**CONTACT OUR TEAM TODAY!** 

(218) 834-5118 serco@sercoloaders.com sercoloaders.com

